



EBARA

EBARA Turbomolecular Pumps

Model EBT

Innovative Technology.

Ceramic-Bearing



Model EBT

EBARA's Model EBT are mechanical-bearing, compound turbomolecular pumps which compliment EBARA's existing line of Model EMT mag-lev turbomolecular pumps. Model EBT pumps are highly efficient, cost effective solutions to your high vacuum pumping requirements. EBARA's Model EBT compound turbomolecular pumps offer an extremely rugged, mechanical bearing design which provides clean, reliable vacuum generation for high tech manufacturing. Typical applications include semiconductor, thin film, photovoltaic, and analytical instruments. EBARA's Model EBT of compound turbomolecular pumps can be mounted in any orientation. These pumps offer high pumping speed and high, light gas compression, making them ideal for UHV and analytical systems.

FEATURES AND BENEFITS


- Rugged Bearing Design Ideal for Mobile Applications
- High Pumping Speeds
- High Compression Ratios for Light Gases
- Fast Starts and Stops
- Quick Venting (No Vent Pulsing)
- Fan or Water Cooling
- ISO or Conflat (CF) Flanges
- Integrated Controller (Selected Models)

APPLICATIONS

- Surface Treatment
- Analytical Instrument Lamps
- Electron / X-Ray Tubes
- Ion / EB-Source
- Wafer Bonding
- Sputter
- Glass / Film Coating
- Exhaust Carts

OPTIONS

- Natural Air or Water Cooling
- Vent Valve Kit
- Nitrogen Purge
- Install Kit (Valves, etc.)
- Isolation Valves

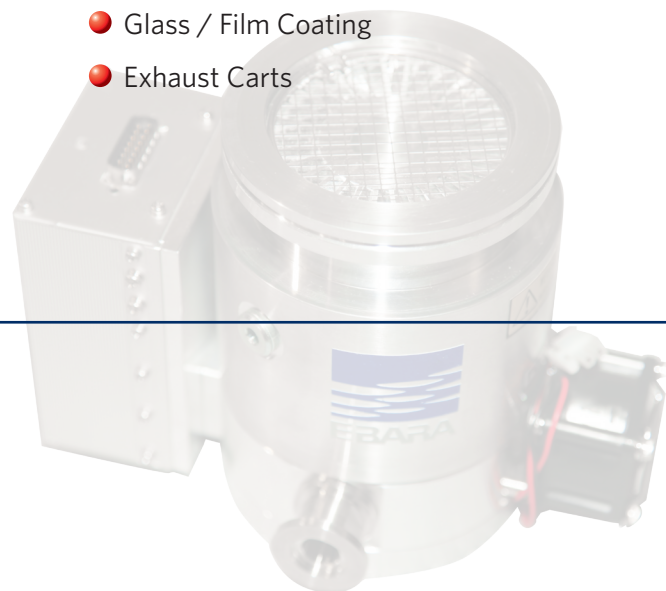

SPECIFICATIONS

Model		EBT70	EBT220	EBT240	EBT350	EBT450	EBT800	EBT1100	EBT1400	EBT2400	
Pumping Speed, L/s	N ₂	75	220	240	350	450	820	1100	1400	2400	
	H ₂	45	100	160	210	240	650	720	750	1100	
Compression Ratio	N ₂	1x10 ⁸									
	H ₂	1.0x10 ⁵	4.0x10 ²	4.0x10 ⁴	2.0x10 ³		1.0x10 ⁴		4.3x10 ³	1.4x10 ⁴	
Ultimate Pressure	CF	Pa	< 1x10 ⁻⁷	< 1x10 ⁻⁶	< 5x10 ⁻⁷	< 1x10 ⁻⁶				-	
		Torr	< 7.5x10 ⁻¹⁰	< 7.5x10 ⁻⁹	< 3.8x10 ⁻¹⁰	< 7.5x10 ⁻⁹				-	
	ISO-R	Pa	< 5 x 10 ⁻⁷	< 1x10 ⁻⁶							
		Torr	< 3.8x10 ⁻⁹	< 7.5x10 ⁻⁹							
Recommended Backing Vacuum Pump	L/min	> 25	> 80				> 250				
	CFM	> 0.88	> 2.85				> 8.80			> 17.60	
Startup Time	min	2.0 - 2.5	1.0 - 1.2	5.5 - 6.0	2.0 - 2.5		7.0 - 9.0		5.5 - 7.0	5.0 - 7.0	
Cooling Type		Air (Fan) / Convection	Air (Fan) / Water								
Weight	CF	kg	5.0	8.0	10.5	9.0	10.0	27.0	28.0	30.0	-
		lb	11.0	17.6	23.1	19.8	22.0	59.5	61.7	66.1	-
	ISO-R	kg	3.0	5.8	7.3	6.0	7.0	26.0	27.0	29.0	45.0
		lb	6.6	12.0	16.1	13.0	15.4	57.3	59.5	63.9	99.2

CONTROLLERS



Model		ETC-S2	ETC-M2
Input Voltage		AC 100 - 110 ± 10% or AC 200 - 230 V ±10%	AC 200 - 230 V ±10%
Input Frequency	Hz	50 / 60 ± 2%	
Input Phase		Single	
Input Power		490 - 610 VA	0.81 - 2.2 kVA
Weight	kg	2.7	8.2
	lb	6.0	18.0
Pump Models		Model EBT70, EBT220, EBT350, EBT450, EBT800, EBT1100	Model EBT800, EBT1100, EBT2400

Model EBT

MODEL DESCRIPTION


EBT	350	F	B	A	B
1	2		3	4	5
1	Model	EBT	Ceramic-Bearing		
2	Size	N ₂ Flow Rates	70		
			220		
			240		
			350		
			450		
			800		
			1100		
			1400		
3	Inlet Flange	C	Conflat		
		B	ISO-B (Bolt)		
		R	ISO-R (Clamp)		
4	Cooling System	A	Air Cooling (Fan)		
		N	Natural Air Cooling (No Fan)		
		W	Water Cooling		
5	Specification Type	B	Standard		
		C	Corrosive Resistant		

PERFORMANCE CURVES

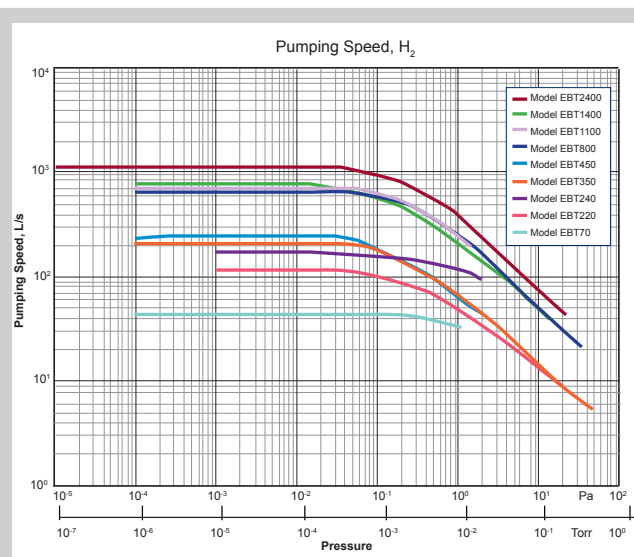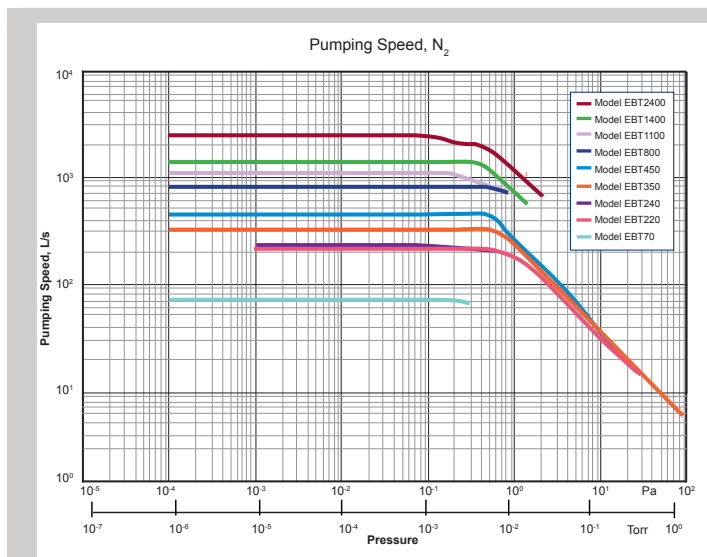


DIMENSIONS

Model EBT70

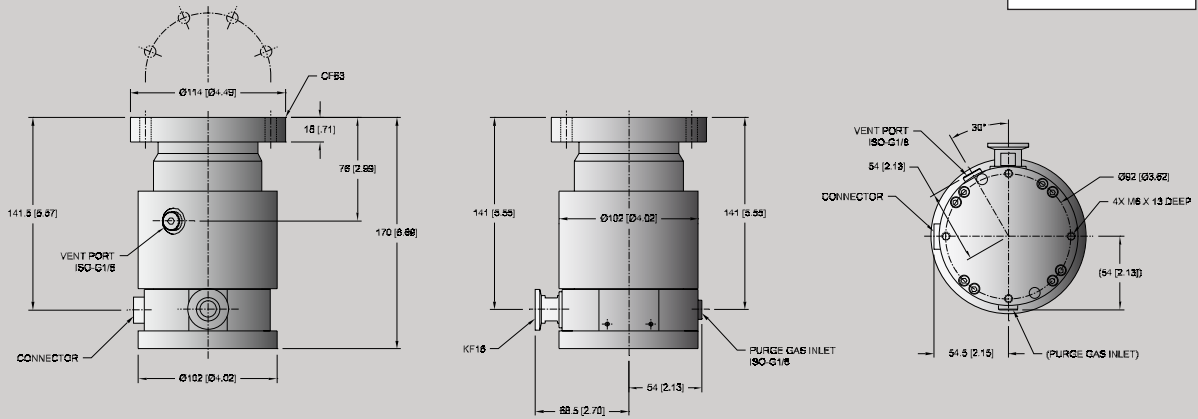


Unit: mm [in]

Model EBT220

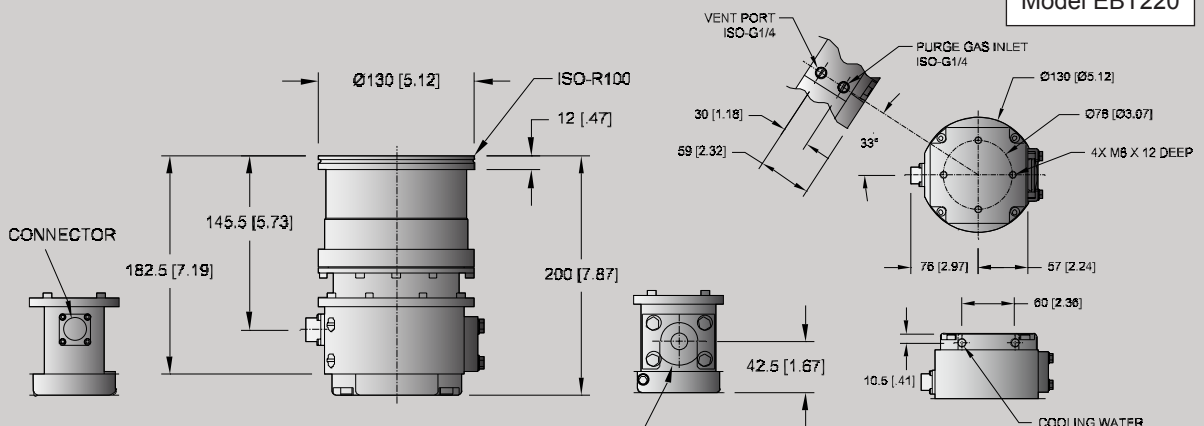

Unit: mm [in]




Model EBT240

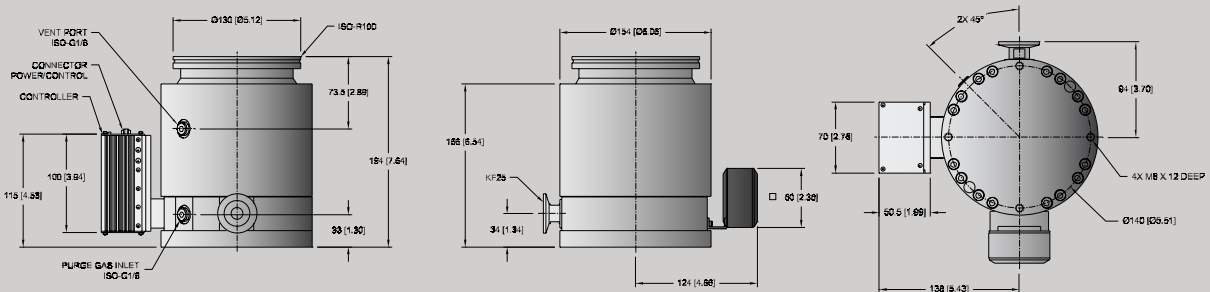


Unit: mm [in]

Model EBT

DIMENSIONS

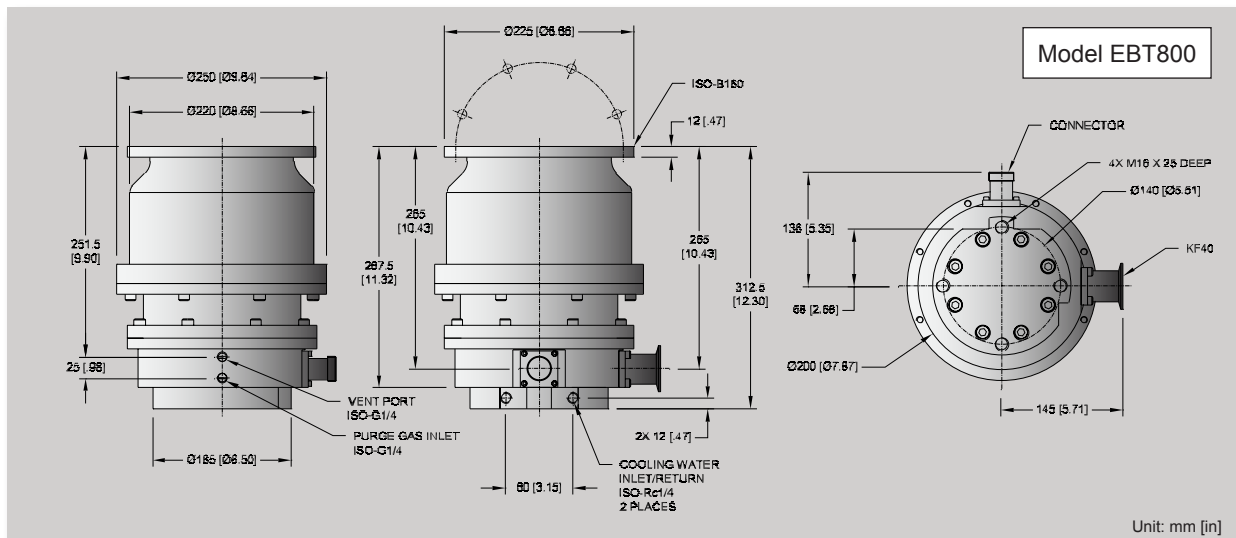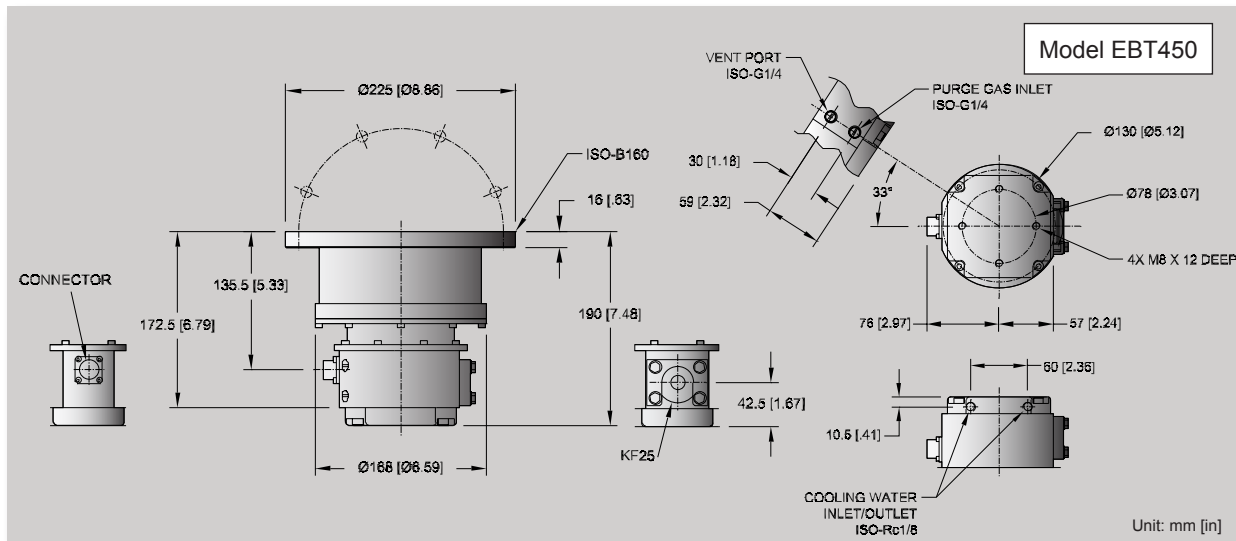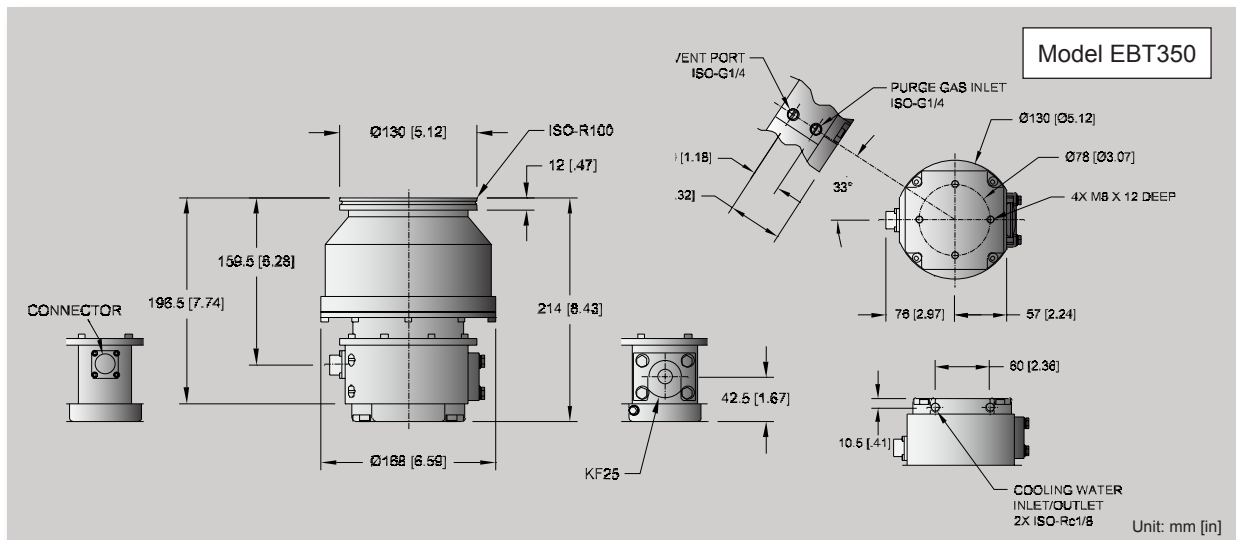


Model EBT1100

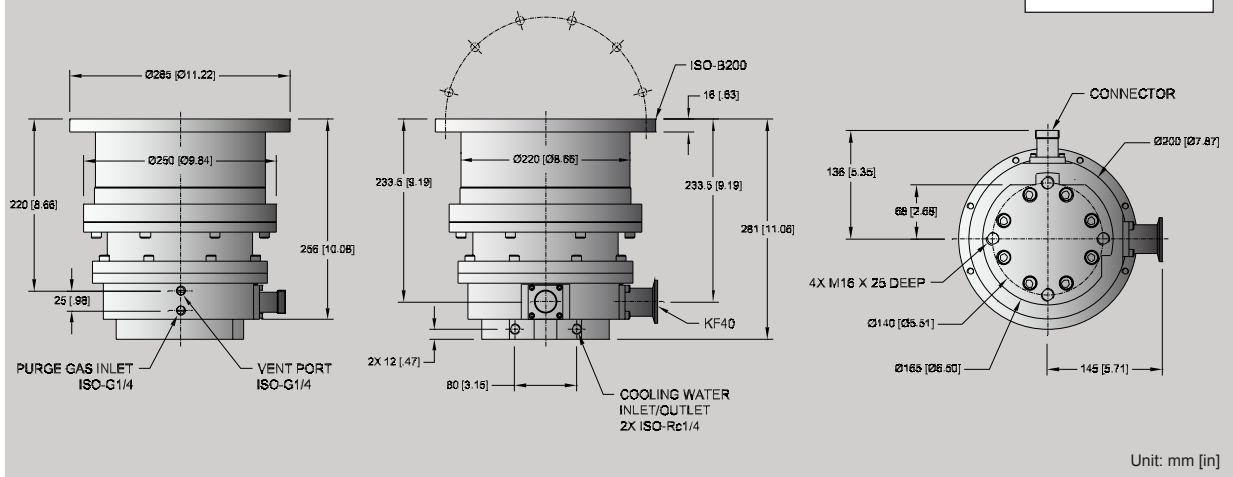


Unit: mm [in]

Model EBT1400

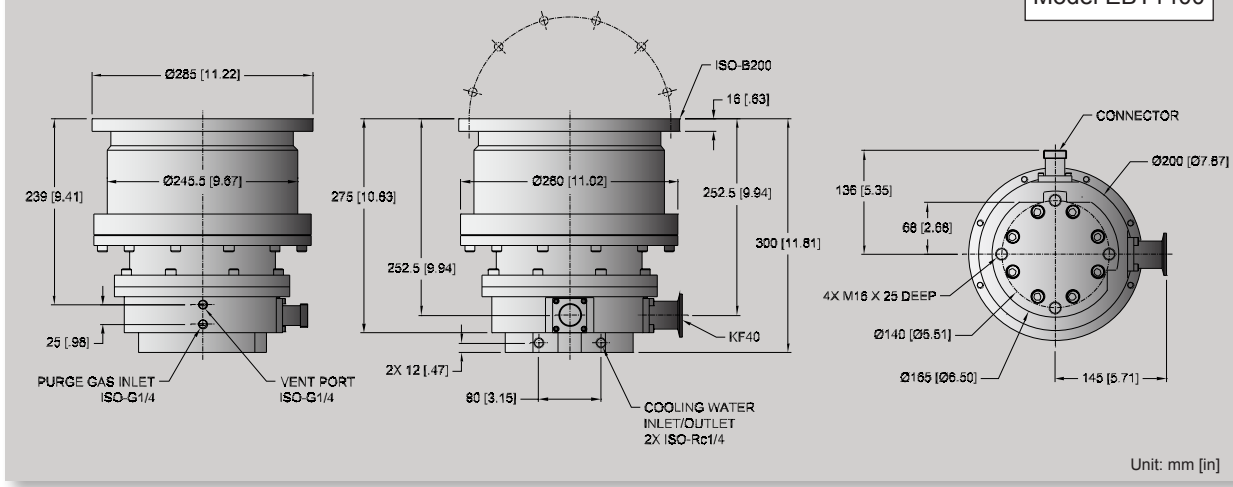

Unit: mm [in]

Model EBT2400

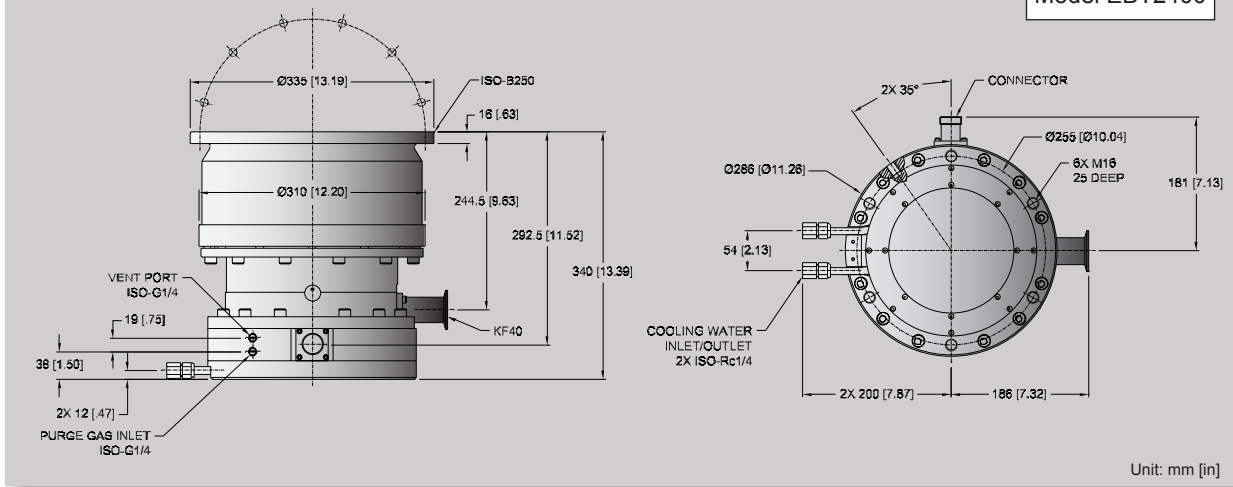

Unit: mm [in]

**EBARA Technologies, Inc.**www.ebaratech.com

51 Main Avenue, Sacramento, California 95838 — Phone: 1-800-535-5376 Fax: 1-916-925-6654

EBARA Corporation Precision Machinery Companywww.ebara.com/en/business/precision

2-1, Hon-Fujisawa 4-chrome, Fujisawa Kanagawa, 251-8502, Japan — Phone: 81-466-83-9000 Fax: 81-466-83-1100

EBARA Field Tech. Corporationwww.eft.ebara.com

2-1, Hon-Fujisawa 4-chrome, Fujisawa Kanagawa, 251-8502, Japan — Phone: 81-466-83-9171 Fax: 81-466-83-1100

GLOBAL NETWORK**U.S.A.**

EBARA Technologies, Inc.
Headquarters: Sacramento, CA
FSC: Sacramento, CA
QRC: San Jose, CA
E. Fishkill, NY
Manassas, VA
S. Portland, ME
Hillsboro, OR
Newburyport, MA

EUROPE

EBARA Precision Machinery Europe
GmbH
Headquarters: HANAU, Germany
FSC: Livingston, UK
QRC: Dresden, Germany
Evry, France
Meyreuil, France
Kildare, Ireland
Haifa, Israel

JAPAN

EBARA Corporation
Precision Machinery Company
Headquarters: Fujisawa, Japan
FSC: Tohoku Fukushima
Hokuriku Toyama
Chubu Mie
Kyusyu Fukuoka
QRC: Kitami Iwate
Tohoku Miyagi
Ibaraki
Chubu Mie
Osaka
Hiroshima
Shikoku Ehime
Fukuoka
Oita
Kumamoto

KOREA

EBARA Precision Machinery KOREA INC
Headquarters: Seoul
FSC: Mogok-Dong

CHINA

Shanghai EBARA Precision Machinery Co.,
LTD
Headquarters: Shanghai
FCS: Shanghai
QRC: Wuxi

TAIWAN

EBARA Precision Machinery TAIWAN INC
Headquarters: Taipei
FSC: Hu-ko
QRC: Linkou
Taichung
Tainan

SINGAPORE

EBARA Engineering Singapore Pte. Ltd.
Headquarters: Tuas Link
FSC: Tuas Link

Patent Pending

UL® and C-UL® are registered trademarks of Underwriter's Laboratories, Inc.

"Model EBT" is our model code.

All specifications are subject to change without notice.

© EBARA Technologies, Inc. | 2014 Printed in USA



0182-L1210311, Rev. C